

Token 600

The seal of effective defence

PN: UPCSBL5660TTOAZ01B
EAN: 6422956011499

Specifications

Capacity	600 VA / 360 W
Type	Line-Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	170 – 280 VAC
Frequency Range	50Hz / 60Hz (Auto Sensing)
Output	
Nominal Voltage	230 VAC
Accepted Voltage range	230 VAC, +/- 10%
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 1%
Power Factor	0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	6ms typical
Indicators type	
LED	AC Mode:Green lighting; Battery Mode:Yellow flashing; Fault:Red lighting
Alarm	Battery mode, Overload mode, Low battery, Fault mode
Protection	
Outlets type	4x Schuko Battery Backup 4x Schuko Surge Protection
Full protection	Overload, discharge, and overcharge protection
Environement	
Noise level	Fanless
Humidity	0-90 % (non-condensing)
Temperature	0-40°C



HID USB



8 x Schuko



Auto-restart

- Compact size for stand and mounting flexibility
- Excellent microprocessor control guarantees high reliability
- Easy replacement battery compartment
- Provides battery backup and surge protected outputs
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Software management
- Boost and buck AVR for voltage stabilization

Battery

Battery Type & Number	1x GP07122F (PN: BTVACGUOBT2FCN01B)
Typical Recharge Time	6~8 hours recover to 90% capacity
Running time on battery (minutes)	25% Load - 15min 50% Load - 5min 30s 75% Load - 0min 40s

Management


Communication port	HID USB
Software	https://www.power-software-download.com/viewpower.html

Physical

Product dimensions	345 x 200 x 100 mm
Product weight	5.05 kg
Retail pack dimensions	425 x 269 x 146 mm
Retail pack Weight	5.45 kg



Running time on battery

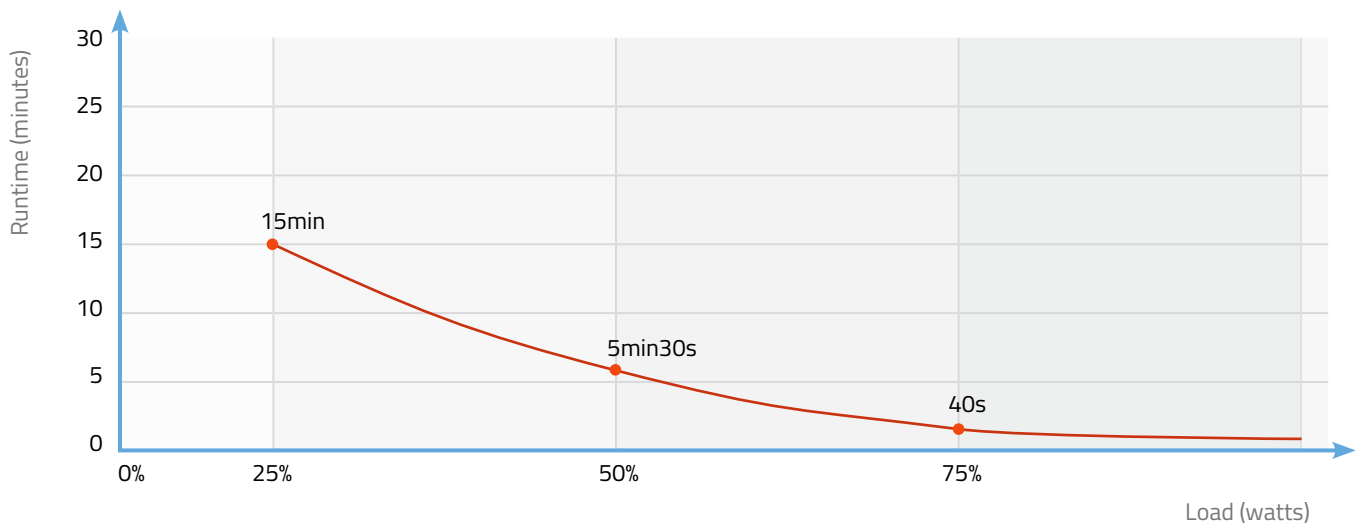

Logistics

Carton Box Size (LxWxH)	461 x 438 x 287 mm
Pieces in the Carton Box	3
Net & Gross weight / CTN	NW: 15.15 kg / GW: 16.35 kg



Certificates

RoHS 2011/65/EU **CE**

