


Standard Loudspeaker

Ceiling Loudspeaker

581263

6 W 5" ceiling loudspeaker, metal

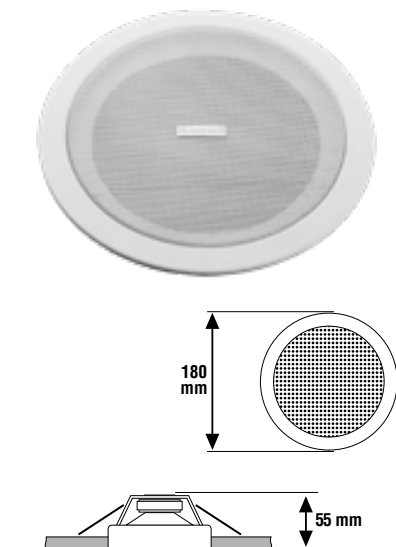

The cost-effective ceiling loudspeaker features an excellent sound reproduction and an esthetically appealing design. It is versatile and distinguishes itself by its high sound pressure and its broad frequency range. It features 6 W Dual Cone driver unit and a back-mounted 100 V transformer. The loudspeaker is CE and RoHS compliant.

Technical Data


Rated Power	6 W
Transformer power taps	6 / 3 / 1,5 W
Rated impedance	1,7 / 3,3 / 6,7 kΩ
SPL 1 W / 1 m	90 dB
Transmission range	120 ... 20000 Hz (-10 dB)
Dispersion angle	160°
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Material	Metal
Color	white, similar to RAL 9003
Weight	approx. 0.71 kg
Cut-out size	(Ø min.) 150 mm
Dimensions	Ø: 180 mm D: 55 mm



Delivery time on request.

581254

Ceiling Loudspeaker EDL 06-165/T

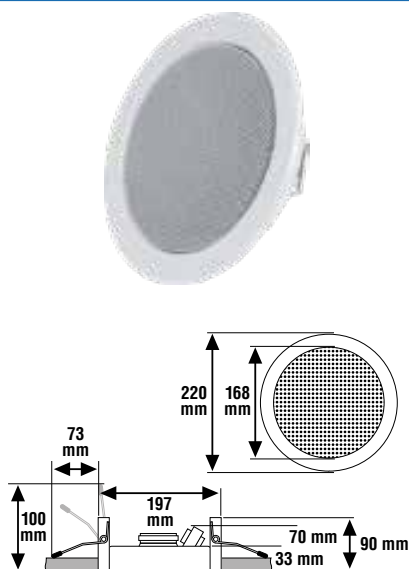

The metal bayonet recessed ceiling loudspeaker with a 165 mm broadband loudspeaker chassis and high efficacy offers excellent sound for all applications. Spring-loaded snap lock with cranked leg spring, clamping strength and shorter tension interval facilitate fast and simple mounting. Flush installation is thus possible with suspended ceilings.

Technical Data

Loading capacity	6 W
Transformer power taps	6 / 3 / 1,5 W
SPL Pmax / 1 m	110.8 dB
SPL 1 W / 1 m	103 dB
Transmission range	97 ... 20.000 Hz
Dispersion angle	180°
Color	white, similar to RAL 9010
Weight	approx. 1.3 kg
Dimensions	Ø: 220 mm D: 100 mm

Accessories

581255 Fire dome (EF 165) for recessed ceiling loudspeakers Part No. 581254