


581271

15 W horn loudspeaker, ABS

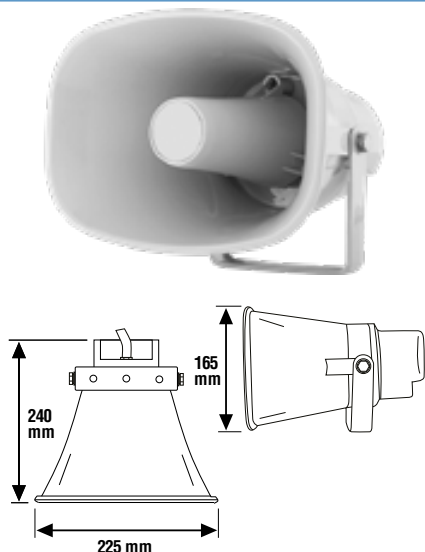

The horn loudspeaker distinguishes itself by its high IP rating and reliability. The enclosure consists of robust and fire-resistant ABS with very low weight. With its esthetic and elegant design, the loudspeaker is suitable for application in a variety of locations, such as in train stations, ports, police stations, traffic junctions, etc. The horn loudspeaker features robust adjustable mounting brackets for precise dispersion of sound.

The loudspeaker is CE and RoHS compliant.

Technical Data


Rated Power	15 W
Transformer power taps	15 / 7,5 W
Rated impedance	0,67 / 1,3 kΩ
SPL 1 W / 1 m	103 dB
Transmission range	350 ... 8000 Hz (-10 dB)
Dispersion angle	140°
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Type of protection	IP 66
Material	ABS
Color	white, similar to RAL 9003
Weight	approx. 1.56 kg
Dimensions	W: 240 mm H: 225 mm D: 165 mm



Delivery time on request.

581272

30 W horn loudspeaker, ABS

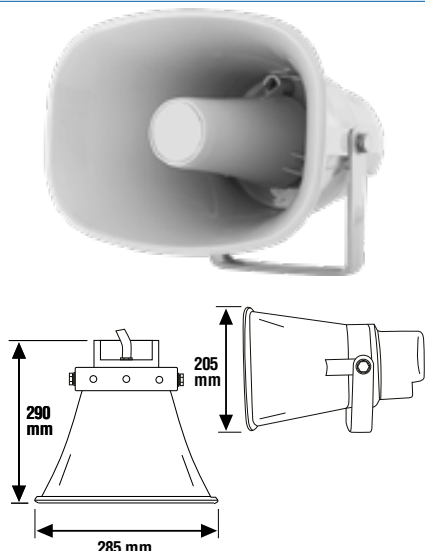

The horn loudspeaker distinguishes itself by its high IP rating and reliability. The enclosure consists of robust and fire-resistant ABS with very low weight. With its esthetic and elegant design, the loudspeaker is suitable for application in a variety of locations, such as in train stations, ports, police stations, traffic junctions, etc. The horn loudspeaker features robust adjustable mounting brackets for precise dispersion of sound.

The loudspeaker is CE and RoHS compliant.

Technical Data

Rated Power	30 W
Transformer power taps	30 / 15 W
Rated impedance	0,33 / 0,67 kΩ
SPL 1 W / 1 m	104 dB
Transmission range	300 ... 10000 Hz (-10 dB)
Dispersion angle	150°
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Type of protection	IP 66
Material	ABS
Color	white, similar to RAL 9003
Weight	approx. 2.1 kg
Dimensions	W: 290 mm H: 285 mm D: 205 mm



Delivery time on request.