


Standard Loudspeaker

Wall Surface Mounted Speaker

581270

6 W cabinet loudspeaker, ABS

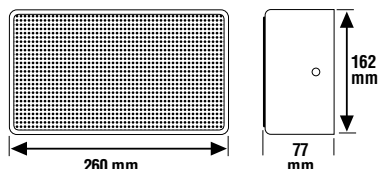

The loudspeaker has a shallow installation height. Its elegant design makes it suited for applications in various environments, such as shopping centers, education institutions, office buildings, hotels, and restaurants.

The loudspeaker features a high-grade loudspeaker chassis, which provides an extraordinary audio output and guarantees long-term durability. The quick and simple installation saves time and costs. The loudspeaker is CE and RoHS compliant.

Technical Data


Rated Power	6 W
Transformer power taps	6 / 3 W
Rated impedance	1,7 / 3,3 kΩ
SPL 1 W / 1 m	90 dB
Transmission range	200 ... 20000 Hz (-10 dB)
Dispersion angle	120°
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Material	ABS
Color	white, similar to RAL 9010
Weight	approx. 1 kg
Dimensions	W: 260 mm H: 162 mm D: 77 mm



Delivery time on request.

581276

10 W cabinet loudspeaker, ABS

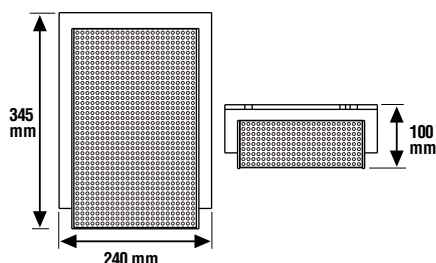

The Cabinet loudspeaker is suitable for various applications, such as shopping centers, supermarkets, educational institutions, office buildings, hotels, and restaurants. It stands out due to its high sound pressure and its wide frequency range, and offers excellent voice and music reproduction.

Available output settings are 5 W and 10 W. A spring terminal on the back side makes cable connection easier. The elegant design in shock-resistant ABS material is kept in discrete white.

The loudspeaker features an extraordinary bass response.

The loudspeaker is CE and RoHS compliant.

Technical Data


Rated Power	10 W
Transformer power taps	10 / 5 W
Rated impedance	1 / 2 kΩ
SPL 1 W / 1 m	92 dB
Transmission range	150 ... 17000 Hz (-10 dB)
Dispersion angle	170°
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Material	ABS
Color	white, similar to RAL 9003
Weight	approx. 1.6 kg
Dimensions	W: 345 mm H: 240 mm D: 100 mm



Delivery time on request.

581277

40 W cabinet loudspeaker, ABS

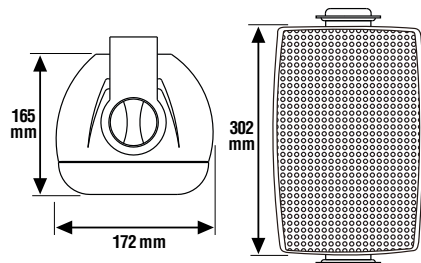

The Cabinet loudspeaker is very well capable of reproducing background music. Spring clips on the back side make a simple installation possible. The loudspeaker is ideal for use in bars, restaurants, shopping centers, video stores, conference rooms, office buildings, trade fair halls, gyms, presentation rooms, etc. The adjustable brackets allow for the flexible positioning of the loudspeaker.

The loudspeaker is CE and RoHS compliant.

Technical Data

Rated Power	40 W
Transformer power taps	40 / 20 / 10 W
Rated impedance	0,25 / 0,5 / 1 kΩ
SPL 1 W / 1 m	84 dB
Transmission range	100 ... 20000 Hz (-10 dB)
Dispersion angle	160°
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Material	ABS
Color	white, similar to RAL 9003
Weight	approx. 3.2 kg
Dimensions	W: 302 mm H: 172 mm D: 165 mm



Delivery time on request.