


582476

20 W column loudspeaker EN 54, metal

Approval as per EN 54-24, 0359/CPD/00456



The 20 W column loudspeaker has a broad frequency range and a high sound pressure level. This guarantees an accurate and intelligible transmission of the evacuation message, as well as excellent sound reproduction. It can be used indoors as well as outdoors, in dry as well as in humid surroundings. Due to its flat design and the white coating, the loudspeaker can be easily integrated in hotels, conference rooms, cinemas, factories, trade fair halls and other buildings. The loudspeaker complies with standard BS 5859 Part 8, and is certified in accordance with EN 54 Part 24.

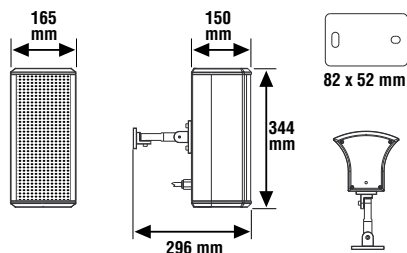

Technical Data

Rated Power	20 W
Transformer power taps	20 / 10 / 5 / 2.5 W
Rated impedance	0,5 / 1 / 2 / 4 kΩ
Sensitivity EN 54-24, 1 W / 1 m	91 dB
Sensitivity EN 54-24, max 1 m	104 dB
Transmission range	300 ... 15000 Hz (-10 dB)
Dispersion angle	146° (H) / 87° (V) @ 1 kHz
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Type of protection	IP 66
Material	Aluminum
Color	white, similar to RAL 9003
Weight	approx. 3.75 kg
Dimensions	W: 165 mm H: 344 mm D: 150 mm
Declaration of Performance	CPR-DoP-2014003



Wall mount included



Delivery time on request.


582477

40 W column loudspeaker EN 54, metal

Approval as per EN 54-24, 0359/CPD/00455



The 40 W column loudspeaker has a broad frequency range and a high acoustic pressure level. This guarantees an accurate and intelligible transmission of the evacuation message, as well as excellent sound reproduction. It can be used indoors as well as outdoors, in dry as well as in humid surroundings. Due to its flat design and the white coating, the loudspeaker can be easily integrated in hotels, conference rooms, cinemas, factories, trade fair halls and other buildings. The loudspeaker complies with standard BS 5859 Part 8, and is certified in accordance with EN 54 Part 24.

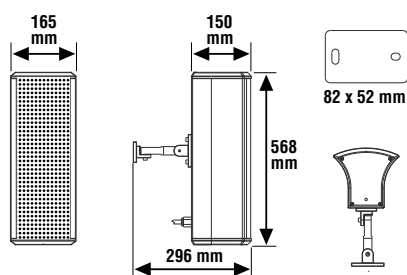

Technical Data

Rated Power	40 W
Transformer power taps	40 / 20 / 10 / 5 W
Rated impedance	0,25 / 0,5 / 1 / 2 kΩ
Sensitivity EN 54-24, 1 W / 1 m	94 dB
Sensitivity EN 54-24, max 1 m	110 dB
Transmission range	300 ... 15000 Hz (-10 dB)
Dispersion angle	147° (H) / 48° (V) @ 1 kHz
Ambient temperature	-25 °C ... 55 °C
Storage temperature	-40 °C ... 70 °C
Air humidity	< 95 %
Type of protection	IP 66
Material	Aluminum
Color	white, similar to RAL 9003
Weight	approx. 5.75 kg
Dimensions	W: 165 mm H: 568 mm D: 150 mm
Declaration of Performance	CPR-DoP-2014003



Wall mount included



Delivery time on request.