


CODE: **AWO152** v1.1/IV
NAME: **7/TRP40/PAR**

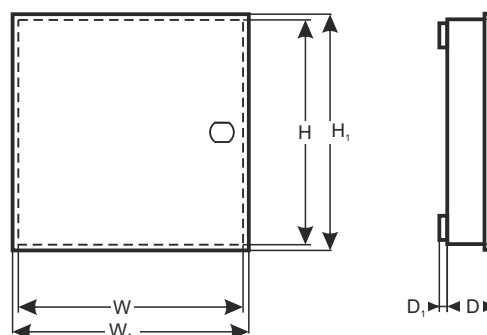

DESTINATION

CONTROL PANELS: (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, MG5000, 5050, PS17, ACM12) +ZX8 (2xZX4, APR3- ADM2,APR3-HUB2, PGM4)

DANE TECHNICZNE

External dimensions of the enclosure:	W=280, H=290, D+D1=80+8 [+/-2 mm]
External dimensions of the front panel:	W1=285, H1=295 [+/-2 mm]
Battery space:	7Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	2,70 / 2,90 [kg]
Transformer:	TRP 40VA/16 V/18 V in the case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V (-15%/+10%), 50 Hz, 200mA (max.)
Power supply output:	U1=16V/AC lub U2=18V/AC (-5%, +15%), I1=2,2 A lub I2=2,0 A (max.)
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x opening casing, wall tamper, 0,5 A@50 V DC max. NC- contacts
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, anten holes for MAGELLAN (antennas), customized enclosure: minimum order quantity 100pcs.
Declaration, warranty:	CE, 2 year from the production date