


CODE: **AWO363** v1.2/IV
NAME: **LED/B-SIN**

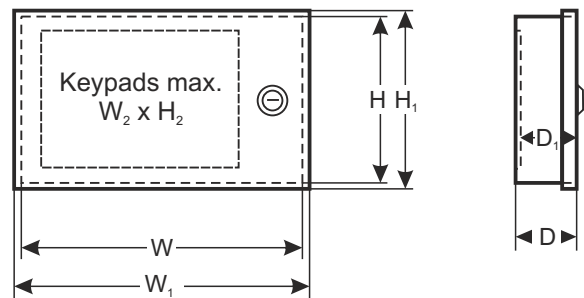

DESTINATION

INTERLOGIX

KEYPADS: CS 5186 (LED), CS 5500 (LCD), ATS 1110 (LCD)

SINTONY

KEYPADS: SAK 33, 34, 71, 72, 73, 74, 21

CADDX NETWORKX

KEYPADS: NX-1508E, NX-1516E(LED Slimline)

GALAXY

KEYPADS: MK-7

PARADOX

KEYPADS: SPC-1686V, ESP- 646

TECHNICAL DATA

External dimensions of the enclosure:	$W=169, H=190, D=50$ [± 2 mm]
External dimensions of the front panel:	$W_1=177, H_1=195$ [± 2 mm]
Keyboard mounting dimensions:	$W_2=110, H_2=185, D_1=41$ [± 2 mm]
Weight net/gross:	0,85kg / 0,90kg [$\pm 0,1$ kg]
Operating environment:	class II, $-10^{\circ}\text{C} \div 40^{\circ}\text{C}$
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC- contacts
Closing:	lockable (various code, two keys included)
Notes:	removable back mounting plate
Declaration, warranty:	RoHS, 2 year from the production date