

Access Control Externally-connected Module


Specification

- **Size:** 35Lx34Wx22H(mm)
- **Material:** High quality elements with superb design
- **Max.overload:** 10A/250VAC 10A/30VDC
- **Suitable for door:** Fail-safe electric locks with signal output
- **Operating temp:** -20 +70°C
- **Output capability:** Applied to double-door interlocking
- **Weight:** 0.018kg

Basic Instruction

Interlocking relay module is the ideal choice for the purpose of interlocking door control project, which is easy to install, professional and capable of standing wear.

Dimension

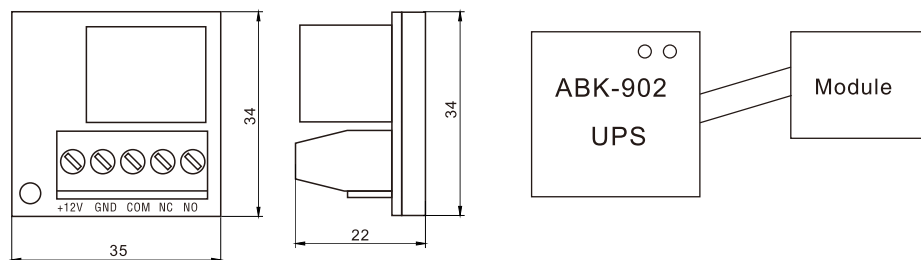

Outline dimensional drawing

Installation

Access Control Externally-connected Module


Specification

- **Size:** 35Lx34Wx22H(mm)
- **Material:** High quality elements with superb design
- **Max.overload:** 10A/250VAC 10A/30VDC
- **Suitable for door:** Fail-safe electric locks with signal output
- **Operating temp:** -20 +70°C
- **Output capability:** Applied to double-door interlocking
- **Weight:** 0.018kg

Basic Instruction

Interlocking relay module is the ideal choice for the purpose of interlocking door control project, which is easy to install, professional and capable of standing wear.

Dimension

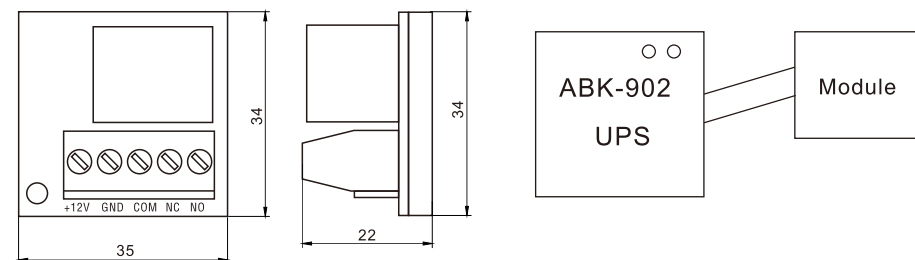

Outline dimensional drawing

Installation