
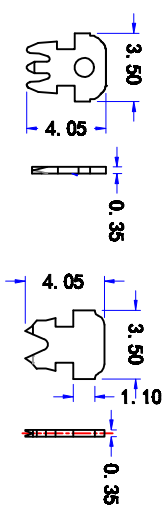
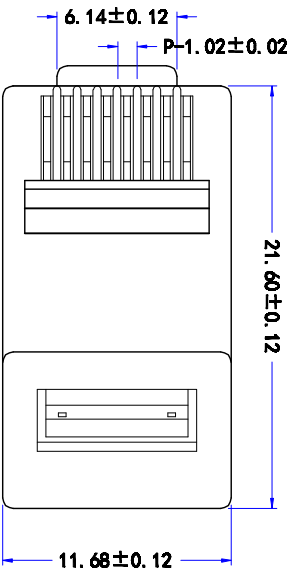
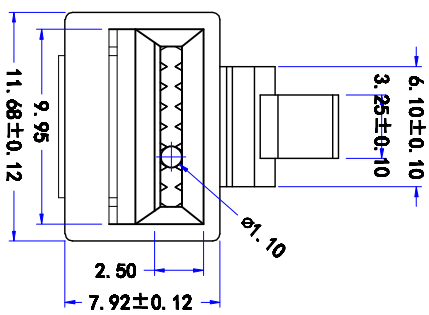
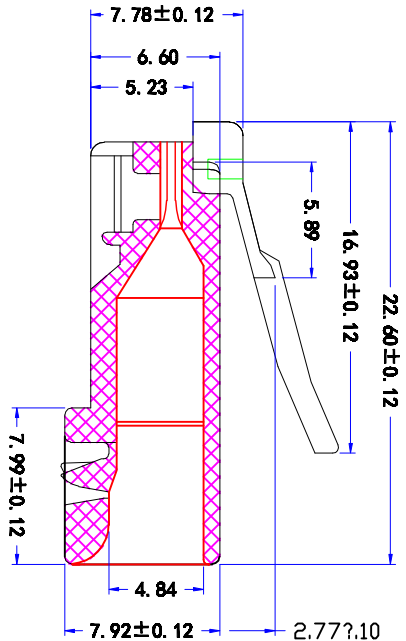


图号	ECN NO.	日期	修改	审核

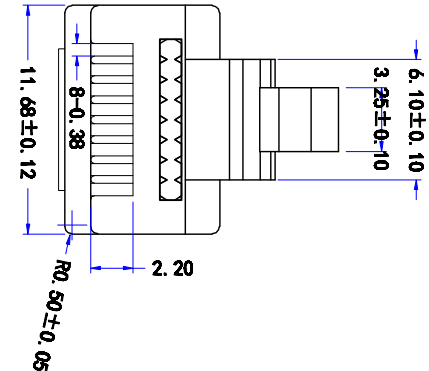

FEATURES:

1 Electrical Test:

- A. 250V AC max at 2 amps.
 - B. Dielectric with standing 500volts AC.
 - C. Insulation Resistance:500 megaohms.
 - D. Termination Resistance:35megaohms.
- 2 Mechanical:
- A. Cable-to-Plug tensile strength-20LBs (89N) min.
 - B. Durability:500 mating cycles.
 - C. gold plating(□01, □03, □06, □15, □30, □50)U"

REV.	版本	DATE	日期	UNITS	单位	MM	TITLE	产品名称
DRAWN	绘图	2014.08.01	2014.08.01	SCALE	比例	FULL	PART NO.	产品编号
APPROVED	审核	PC	材质	TOL.	公差	0.00	VIEW	视图
PC	防火等级	94V2	(聚碳酸酯)					第三角法