

DS-KH8381-WTE1/Flush 8 Series Indoor station




- 7-inch IPS touch screen with 1024 × 600 resolution
- Excellent metal appearance design
- One physical button design for easier open the door
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door and live view remotely
- Standard IEEE802.3at PoE power supply and power the lock
- Supports up to 16 indoor extensions linkage
- Elevator access control
- Supports surface and flush mounting
- Rich interfaces: alarm in, RS-485, relays, TF slot

▪ Specification

System parameters	
Operation system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful IPS
Resolution	1024*600
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Video compression standard	H.265 ; H.264
Focal length	/
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711u、G.711a、Opus、AAC-LD、AAC-LC、G.726、G.722.1
Audio output	1 built-in loudspeaker
Audio compression bitrate	16、32、64 Kps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Message capacity	TF card inserted: 200 captured pictures, 200 alarm records Without TF card: 2 MB RAM for picture storage; The storage number is decided by the picture size, 200 alarm records
Notice capacity	200
Linked network camera capacity	16
Linked indoor extensions capacity	16
Linked doorphone capacity	/
Network parameters	
Network protocol	TCP/IP, SIP, RTSP
Wi-Fi	WiFi 802.11b/g/n
Wireless network	1 RJ-45 10/100Mbps self-adaptive
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/

RS-485	1
USB	/
TF card	Support TF card, up to 128 G
Alarm output	/
Lock control	4 relays, Max. 30 VDC 1A
Power supply output	Max. 12 VDC 0.5 A
Debugging port	1
Relay	4
General	
Button	1 physical button(s)
Installation	Flush mounting, surface mounting, table mounting

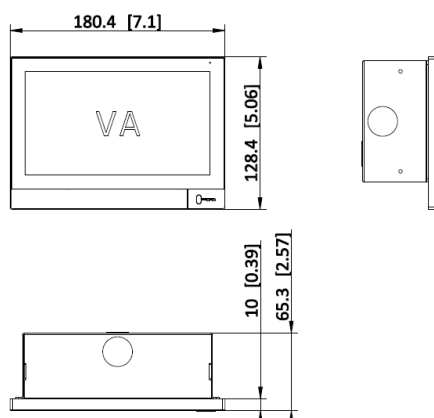

Unit: mm [inch]

SCALE 1:1

▪ Accessory

▪ Included

DS-KABH8380-G



▪ Optional

DS-KABH8380-T



▪ Installation Methods

In-Ceiling Mounting
DS-KABH8380-G

**Inclined Ceiling
Mounting**
DS-KABH8380-T

See Far, Go Further



www.hikvision.com
support@hikvision.com

