


Touch Series

Overdoor Light

L926

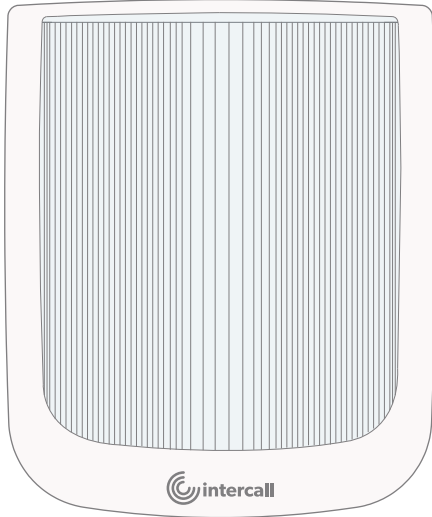

Overview

The L926 Overdoor Light is designed to be located outside the room above the doorway.

The Overdoor Light follows the Call Point(s) in the room, locally alerting staff to call activity from the Call Point(s).

The unit may be configured to follow a single Call Point or multiple Call Points in a Group for 'End-of-corridor' indication.

The High intensity twin LED light sources are housed behind a frosted dome to provide maximum visibility.

The unit features integral sounder which may be configured to provide audible alert to specific Events as required (Eg Emergency)

The unit may be configured to respond to specific Events (Eg Crash Call) for area indication as required.

The unit forms part of the Intercall Touch range of products and is styled to complement other products in the the Intercall Touch range.

The Intercall Touch system is fully addressable and comprises a two core data bus which powers this device while also delivering synchronisation data from the Intercall Touch Controller.

Features

- Large frosted lens to provide maximum visibility.
- High Intensity Multicoloured LED's indicating call point status.
- Programmable Sounder to provide audible alert.
- Attractive unit with high gloss finish.
- Can follow single call point or group call points as required.
- Powered from the Touch Bus.
- Fully programmable to suit local requirements.

Specification

System: Intercall Touch Bus.

Power: Bus Powered Nominal 12V

Terminals: BUS (+/-)

Fixing: Wall Mounted.

Material: ABS Mix.

Finish: High Gloss white.

Weight: 126g

Dimensions

