


NUFxU-HE Frame Data Sheet

Model NUF1U-HE, NUF2U-HE, NUF3U-HE

Features

- Available in single, dual, and triple styles
- Can be used with 60*60 HE-modules
- Requires single, double, or triple European style backbox
- All frames includes a metal adapter
- Supports ready-made daisy-chain cables for fast room bus connection
- 71mm module spacing in dual and triple frame

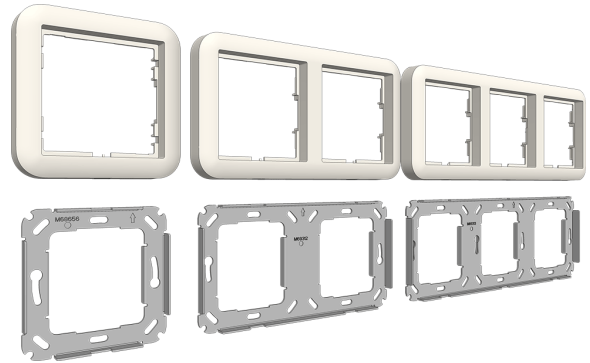

Description

The NUF-series European-style frames allow mounting of one to three modules on the adjacent horizontally mounted backboxes. When using double or triple frames you can daisy-chain those modules with a pre-made connection cable (P/N NUAUCC-HE). This is a faster installation method than terminating connection cable onsite.

The NUF-series frames are available as double and triple frames which helps save space in the bed head when multiple modules are needed per bed.

Single frame can be used with a spacer to allow surface mounting when a backbox is not available. When more than one module need to be surface mounted, every module will need a spacer and single frame. Spacers can be connected side-by-side without a gap.

The metal adapter included with dual and triple frames ensures the spacing of the modules are correct and level. The single frame also includes the metal adapter.

Screws for the metal adapter are included with the backboxes.

A single frame can be mounted on a single European backbox. Dual frames are mounted on two adjacent single European backboxes. The triple frame will require three adjacent single European backboxes.

Specifications

Weight	Single 42g (1.5oz) Double 85g (3.0oz) Triple 128g (4.5oz)
Compatible electrical boxes (Metal or plastic) European Union United Kingdom	EU box (or equivalent) Single backbox with mounting holes 60mm (2.36in.) MK Honeywell models (or equivalent) 1-gang: 861ZIC, 866ZIC, 877ZIC Note: An additional mounting plate will be needed if used with a UK backbox. Single: NUMP86-HK Double: NUMPD86-HK
Dimensions (H × W × D)	Single 81 × 81 × 13mm (3.19 × 3.19 × 0.50in.) Double 81 × 152 × 13mm (3.19 × 5.98 × 0.50in.) Triple 81 × 223 × 13mm (3.19 × 8.78 × 0.50in.)
Enclosure material	PBT/PC enclosure rated UL94-V0
Color	White (NCS S0300-N)
Hardware compatibility	Compatible with 60*60 HE-series modules
Environment	Operating temperature: 0°C to 50°C (32°F to 122°F) Storage temperature: -25°C to 55°C (-13°F to 131°F) Relative Humidity: 0 to 95%, non condensing at 40°C (104°F) Enclosure protection rating: IP40
Regulatory compliance  	The following complies with the relevant dates and amendments of all the following standards (valid references to dates and amendments are stated in the Declaration of Conformity): RoHS, REACH
Accessories	Single 86mm flat mounting plate (P/N NUMP86M-HK) Double 86mm flat mounting plate (P/N NUMPD86M-HK) Triple 86mm flat mounting plate (P/N NUMPT86M-HK) Single 86mm UK backbox mounting plate (P/N NUMP86-HK) Double 86mm UK backbox mounting plate (P/N NUMPD86-HK) Pre-made connection cable (P/N NUAUCC-HE)