





Nurse Terminal

Quick Start Guide


UD43066B

1 Appearance

Device Appearance

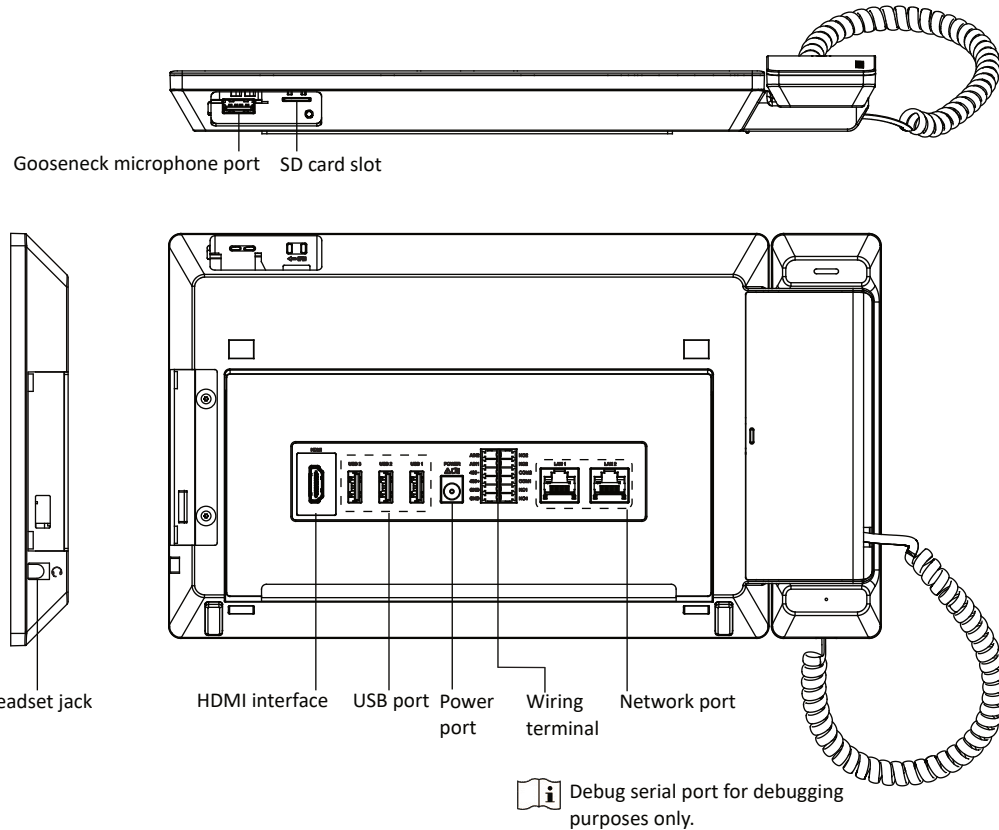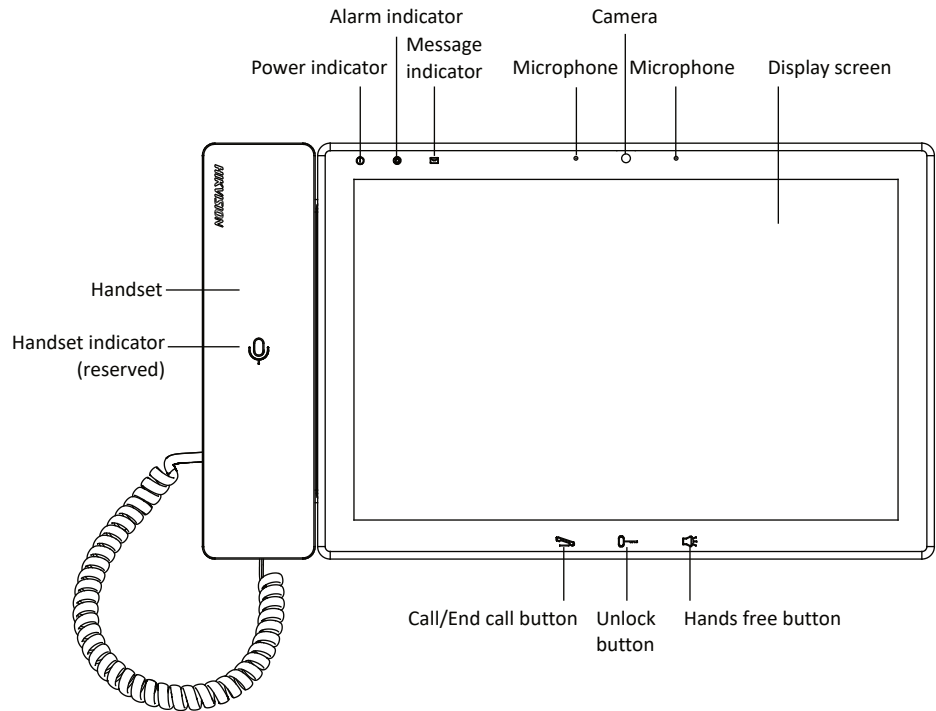

Speaker Appearance (optional)

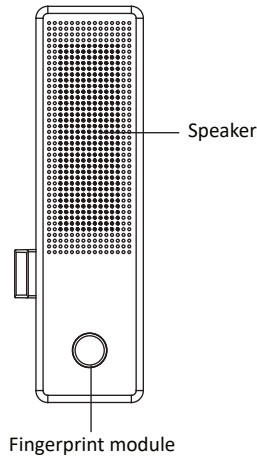

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only.
- The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (<https://www.hikvision.com>). Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision") makes no warranties, express or implied.
- Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

About this Product

This product can only enjoy the after-sales service support in the country or region where the purchase is made.

Acknowledgment of Intellectual Property Rights


- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
- **HIKVISION** and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.
- **HDMI**™ The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.
- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

2 Wiring

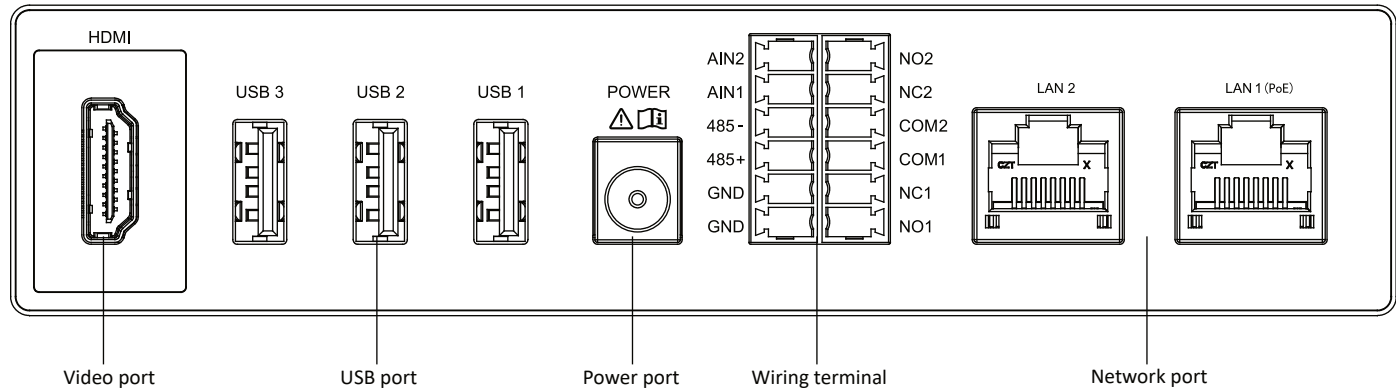

HDMI: HDMI signal output

USB1/USB2/USB3: USB port

USB3 is for debugging only and cannot connect to a USB flash drive.

POWER: 12 VDC power input

NO1: Alarm output 1 (normally open)

NC1: Alarm output 1 (normally closed)

COM1: Common terminal 1

NO2: Alarm output 2 (normally open)

NC2: Alarm output 2 (normally closed)

COM1: Common terminal 2

AIN1: Alarm input 1

AIN2: Alarm input 2

RS-485+: RS-485 communication port

RS-485-: RS-485 communication port


GND: Signal ground

LAN1 (PoE): Network port (supports PoE)

LAN2: Network port (reserved)


3 Preparations Before Installation

- A sticker is required for installing the device.
- Before the installation, check whether the power supply meets power requirements.
- Complete the wiring sequence before installation. For more information, see Section 2.
- Always cut off the power supply to the device during installation.
- A mounting bracket (optional) is always required for both desktop mounting and wall mounting. Bracket dimensions are as follows.

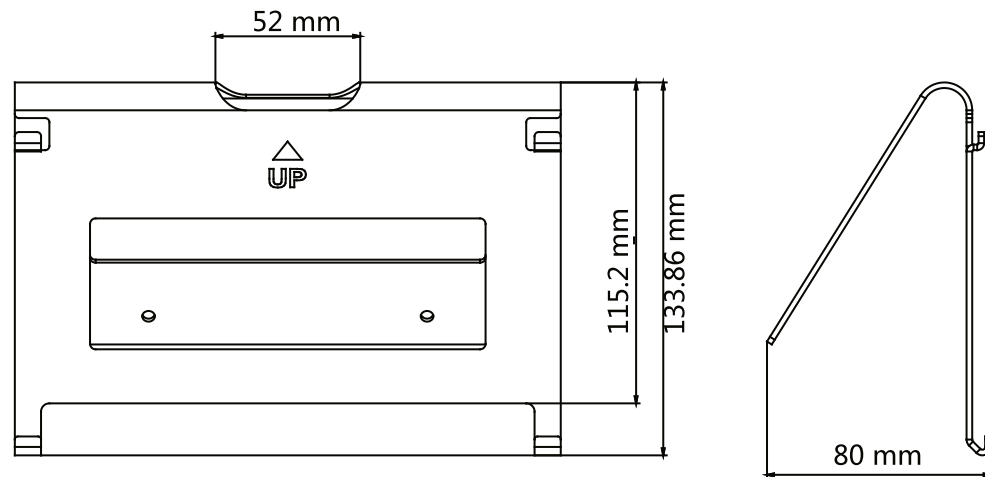


4 Installation of Accessories

Installing the Speaker (optional)

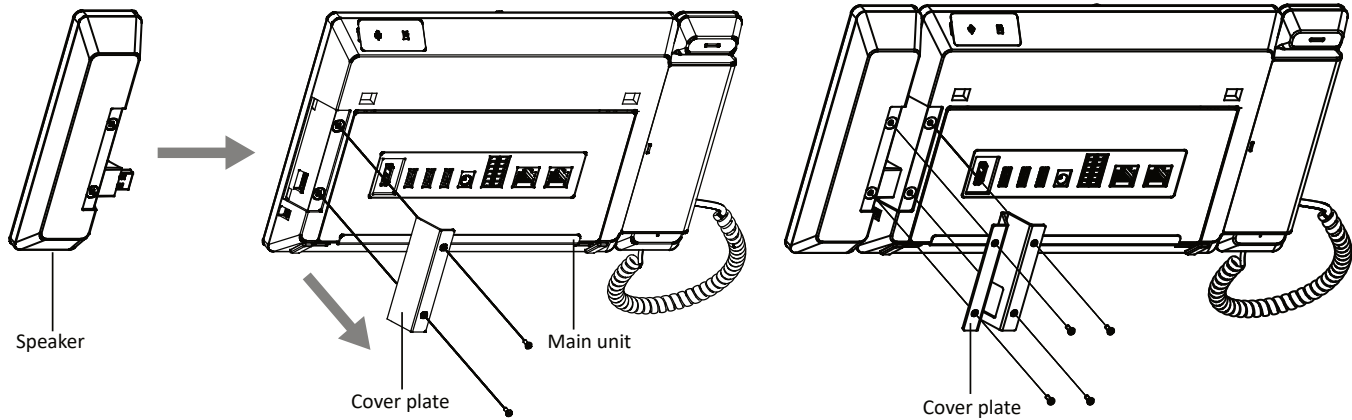

- 1 Remove the two screws and cover plate from the rear panel using a screwdriver.
- 2 Remove the mounting plate and insert the USB connector of the speaker into the port.
- 3 Fasten the cover plate of the speaker to the device with four screws.

Installing the Gooseneck Microphone (optional)

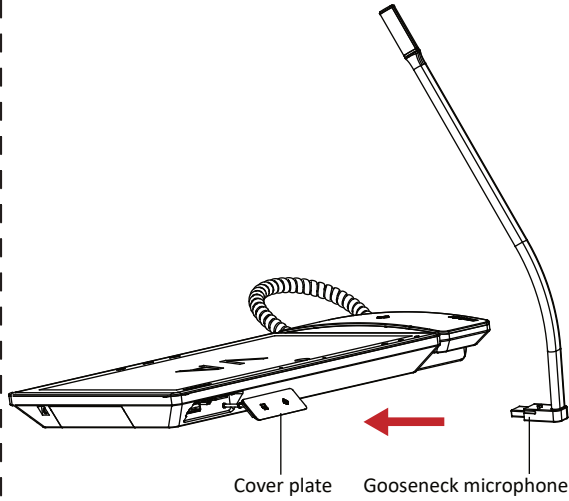

- 1 Open the cover plate on the port on the top panel.
- 2 Insert the gooseneck microphone into the gooseneck microphone port.

Warning

- While installing and using this device, all electrical safety regulations of the country and region where the product is used must be strictly observed.
- Warning! Always replace a fuse with one that has the same kind and rating. Otherwise there is a risk of electric shock or fire.
- Caution! This device can only be used with supporting brackets. Using with others (such as carts, shelves, or handling devices) may lead to instability and personal injury.
- To prevent possible hearing damage, do not listen to music at high volume for an extended period of time.
- A centralized power supply, if used, should meet the power requirements for the device.
- When connecting wires, disassembling, or similar, always cut off the power supply to the device. Never conduct such tasks with the power connected.
- Maintain proper ventilation around the device to avoid heat buildup.
- If the device emits smoke, odor, or noise, immediately disconnect the device from the power supply, remove the power cable, and contact the distributor or service center.
- If the device is not working properly, contact the store where you purchased the device or the nearest service center. Do not disassemble or modify the device in any way. (The company will not assume responsibility for any issues that arise due to unauthorized modification or repair).

Caution

- + indicates the positive polarity. - indicates the negative polarity.
- Do not place an exposed flame source, for example, a lit candle, on the device.
- The USB port on the device can only be used for connecting a USB flash drive. Do not use it for charging or carrying other loads.
- The serial port on the device is only used for debugging and is not intended for users.
- Do not clean the device with corrosive liquids (such as disinfectant or alcohol) or spray them directly onto the device. Otherwise, the device may be damaged or malfunctioning.
- Please install the device in strict accordance with the installation instructions set forth in this guide.
- For safety, the device must be securely mounted to a wall or ceiling.
- Do not drop objects on the device or shake the device vigorously, and keep the device away from magnetic interference. Avoid installing the device in a place where the surface vibrates or where the device is vulnerable to impact. Otherwise, the device may be damaged.
- Please do not use the device in high temperature, low temperature, or high humidity environments. For specific temperature and humidity requirements, refer to the parameter table.
- Devices for indoor use must not be exposed to rain or high humidity.

Instruction

Installation and maintenance personnel requirements:

- Have basic knowledge and installation skills for access control systems and compositions.
- Have basic knowledge and operation skills for low voltage wiring and low voltage electric circuit wiring.
- Have basic knowledge and skills regarding basic network security and be able to read and understand the content of this manual.

6 Quick Setup

You must activate the device when you use it for the first time. You will be automatically directed to the activation interface when the device is powered on.

Local Activation

1. After the device is powered on, the screen turns on and you will be automatically directed to the activation interface.
2. Create your activation password and confirm the password.
3. Tap "OK." The device will automatically go to the Quick Setup interface.



In order to improve security while using the product on the network, set a password between 8–16 characters in length, consisting of at least two kinds of the following characters: digits, lowercase and uppercase letters, and special characters.

Quick Setup

Upon activation, the device will automatically go to the Quick Setup interface.

1. Configure the network settings and tap "Next."
 - Manually configure the network settings: Manually enter the IP address, subnet mask, and default gateway of the device.
 - Automatically obtain network parameters: When you enable "Obtain an IP address automatically," the device will automatically obtain network parameters.
2. Configure the community No. and device ID, create an SIP registration password, and tap "Finish."




For other configurations, see User Manual.



Scan the QR code to see the User Manual

5 Installation

Desktop Mounting

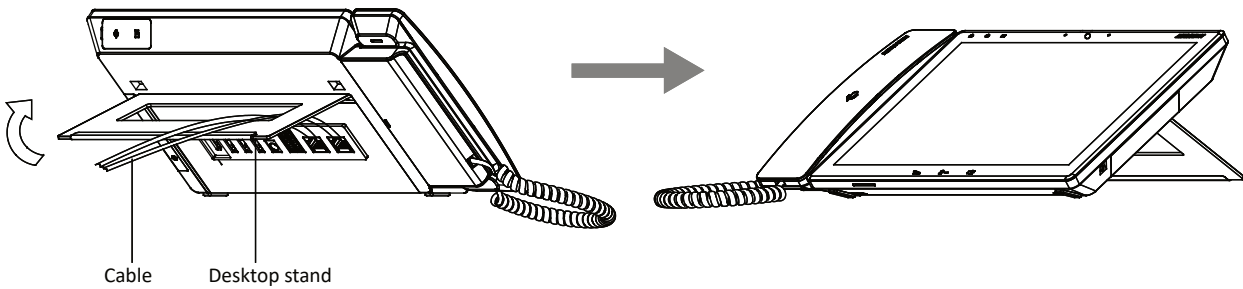

- 1 Connect cables to their respective connectors and route them through their respective cable holes on the desktop stand.
- 2 Adjust the desktop stand to an appropriate angle and place the device in an appropriate position.



You are advised to adjust the desktop stand to its maximum opening and closing angle.