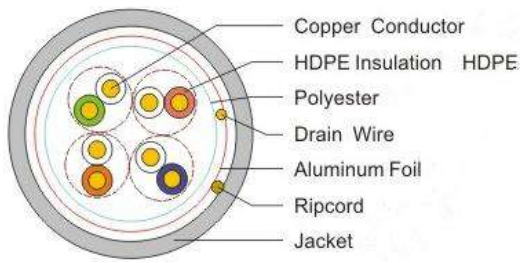


DATASHEET

Specifications

INDESIDE		4P	CONFIGURATION
CONDUCTOR	Configuration	4X2X0.5mm±0.015	
	Material	BARE COPPER	
	Work datapss	150-160M	
INSULATION	Material	HDPE	
	PE OD	Φ0.92±0.05mm	
PAIRED PITCH	blue/blue&white	12mm	
	Orange /Orange &white	16mm	
	green/green&white	14mm	
	Brown/Brown&white	18mm	
INNER SHIELD	Material	Alumium	
	RIPCORDER	Nylon	
	PACKAGE	305M/BOX	
SKIN	Material	PVC	Inside cable sequence: Blue/Blue&White, Orange /Orange &White, Green/Green&White, Brown/Brown&White. 
	Color	Gray	
	PVC OD	5.0mm±0.2MM	
	PVC Thickness	0.51±0.03mm	
	SERFACE	SMOOTH	
PERFORMANCE	conductor resistanceΩ /100m.20℃	≤9.1Ω	
	Conductor allow load current(A)	0.5A	
	voltage rating(V)	≤30V	
	operating temperature (℃)	—20℃~75℃	
PRINTING	COMMUNICATIONS CABLE 4/24AWG CAT5E FTP VERIFIED TO TIA/EIA 568B.2 & ISO/IEC 11801 001-305M		